



FOOT PF Ø80 M8 H76+3

J0950	FOOT PF Ø80 M8 H76+3
MATERIAL	black PA shell galvanized steel stem non-slip synthetic rubber disk
COMMERCIAL INFO	A2 stainless steel stem in pack of 4 pcs on demand
USAGE NOTES	max static load 16000 N holes with diaphragm for fixing

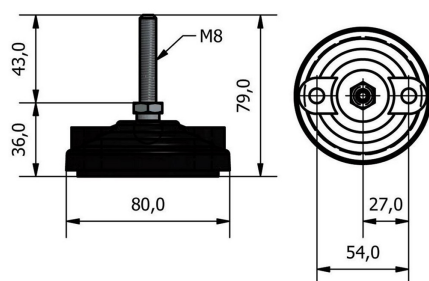


FOOT PF Ø80 M8 H101+3

J0970	FOOT PF Ø80 M8 H101+3
MATERIAL	black PA shell galvanized steel stem non-slip synthetic rubber disk
COMMERCIAL INFO	A2 stainless steel stem in pack of 4 pcs on demand
USAGE NOTES	max static load 16000 N holes with diaphragm for fixing




FOOT PF Ø80 M10 H76+3

J1050	FOOT PF Ø80 M10 H76+3
MATERIAL	black PA shell galvanized steel stem non-slip synthetic rubber disk
COMMERCIAL INFO	A2 stainless steel stem in pack of 4 pcs on demand
USAGE NOTES	max static load 16000 N holes with diaphragm for fixing

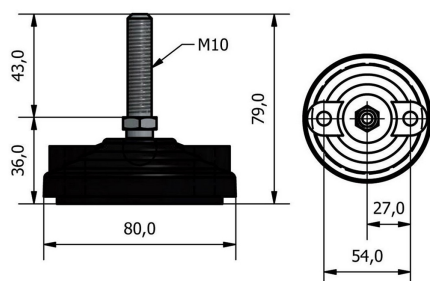


FOOT PF Ø80 M10 H101+3

J1100	FOOT PF Ø80 M10 H101+3
MATERIAL	black PA shell galvanized steel stem non-slip synthetic rubber disk
COMMERCIAL INFO	A2 stainless steel stem in pack of 4 pcs on demand
USAGE NOTES	max static load 16000 N holes with diaphragm for fixing

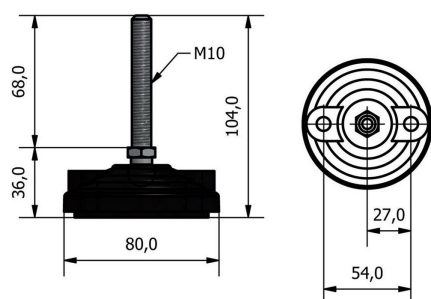


FOOT PF Ø80 M10 H131+3

J1150	FOOT PF Ø80 M10 H131+3
MATERIAL	black PA shell galvanized steel stem non-slip synthetic rubber disk
COMMERCIAL INFO	A2 stainless steel stem in pack of 4 pcs on demand
USAGE NOTES	max static load 16000 N holes with diaphragm for fixing

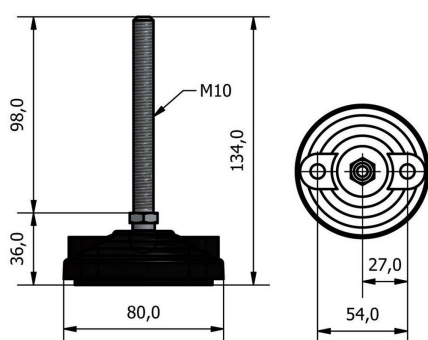


FOOT PF Ø80 M16 H101+3

J1400	FOOT PF Ø80 M16 H101+3
MATERIAL	black PA shell galvanized steel stem non-slip synthetic rubber disk
COMMERCIAL INFO	A2 stainless steel stem in pack of 4 pcs on demand
USAGE NOTES	max static load 16000 N holes with diaphragm for fixing

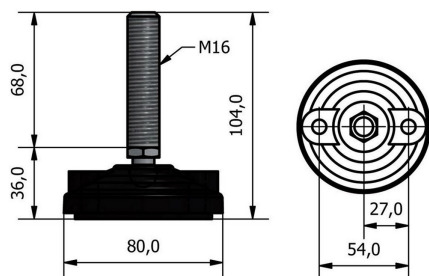

FOOT PF Ø80 M16 H141+3

J1450	FOOT PF Ø80 M16 H141+3
MATERIAL	black PA shell galvanized steel stem non-slip synthetic rubber disk
COMMERCIAL INFO	A2 stainless steel stem in pack of 4 pcs on demand
USAGE NOTES	max static load 16000 N holes with diaphragm for fixing

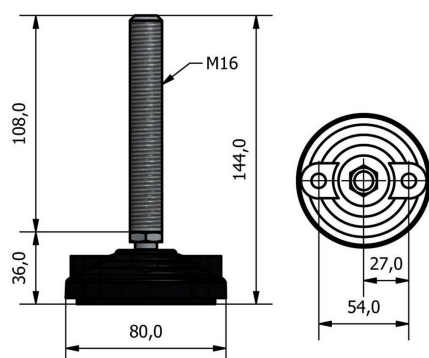

FOOT PF Ø80 M16 H181+3

J1500	FOOT PF Ø80 M16 H181+3
MATERIAL	black PA shell galvanized steel stem non-slip synthetic rubber disk
COMMERCIAL INFO	A2 stainless steel stem in pack of 4 pcs on demand
USAGE NOTES	max static load 16000 N holes with diaphragm for fixing

